

10Gb/s XFP CWDM Transceiver (KW8910-xx)
Hot Pluggable, Duplex LC, 1271~1611nm, CWDM DFB&PIN, SMF



- ◇ PIN photo-detector
- ◇ Duplex LC connector
- ◇ 2-wire interface for management and diagnostic monitor
- ◇ XFI electrical interface with AC coupling
- ◇ Power supply voltages : +3.3V
- ◇ Temperature range 0°C to 70°C
- ◇ Power dissipation: <1.8W
- ◇ RoHS Compliant

Features:

- ◇ Support multi protocol from 9.95Gb/s to 11.3Gb/s
- ◇ Hot pluggable 30 pin connector
- ◇ Compliant with XFP MSA
- ◇ 8.5dB optical link budget
- ◇ 1271~1611nm CWDM DFB transmitter,

Applications:

- ◇ CWDM Networks
- ◇ SONET OC-192/SDH STM-64
- ◇ 10GBASE-LR/LW Ethernet
- ◇ 10G Fiber Channel

Description:

Kewei fiber' KW8910-xx Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. The high performance uncooled CWDM DFB transmitter and high sensitivity PIN receiver provide superior performance for SONET/SDH, 10G FC and Ethernet applications.

● **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Operating Temperature	T _{OP}	0	+70	°C
Supply Voltage	V _{CC}	-0.5	+4.0	V

● **Electrical Characteristics (T_{OP} = 0 to 70 °C)**

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage	V _{CC}	3.135		3.465	V	
Supply Current – V _{CC} supply	I _{CC}			500	mA	
Module total power	P			1.8	W	
Transmitter						
Input differential impedance	R _{in}		100		Ω	1
Differential data input swing	V _{in,pp}	150		820	mV	
Transmit Disable Voltage	VD	2.0		V _{CC}	V	

10Gb/s XFP CWDM Transceiver (KW8910-xx)
Hot Pluggable, Duplex LC, 1271~1611nm, CWDM DFB&PIN, SMF

Transmit Enable Voltage	VEN	GND		GND+ 0.8	V	
Transmit Disable Assert Time	T_off			100	ms	
Tx Enable Assert Time	T_on			100	ms	
Receiver						
Differential data output swing	Vout,pp	300	500	850	mV	
Data output rise time	tr		-	35	ps	2
Data output fall time	tf		-	35	ps	2
LOS Fault	V _{LOS fault}	V _{cc} – 0.5		V _{cc HOST}	V	3
LOS Normal	V _{LOS norm}	GND		GND+0.5	V	3
Power Supply Rejection	PSR	See Note 4 below				4

1. After internal AC coupling.
2. 20 – 80%
3. Loss Of Signal is open collector to be pulled up with a 4.7k–10kohm resistor to 3.15–3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
4. Per Section 2.7.1. in the XFP MSA Specification.

● **Optical Characteristics (T_{OP} = 0 to 70°C)**

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Operating Date Rate	BR	9.95		11.3	Gb/s	
Bit Error Rate	BER			10 ⁻¹²		
Average Optical Power	P _{MAX}	-6		-1	dBm	1
Optical Wavelength	λ	λ-6.5		λ+6.5	nm	
Optical Extinction Ratio	ER	3.5			dB	
Spectral Width	Δλ			1	nm	
Side mode Suppression ratio	SMSR _{min}	30			dB	
Rise/Fall Time (20%~80%)	Tr/Tf			35	ps	
Average Launch power of OFF Transmitter	P _{OFF}			-30	dBm	
Tx Jitter	T _{Xj}	Compliant with each standard requirements				
Optical Eye Mask		IEEE802.3ae				2
Receiver						
Operating Date Rate	BR	9.95		11.3	Gb/s	
Receiver Sensitivity	Sen			-14.5	dBm	2
Maximum Input Power	P _{MAX}	0			dBm	2
Optical Center Wavelength	λ _C	1260		1620	nm	
Receiver Reflectance	R _{Rx}			-27	dB	
LOS De-Assert	LOS _D			-15	dBm	
LOS Assert	LOS _A	-25			dBm	
LOS Hysteresis	LOS _H	0.5		5	dB	

Notes:

1. The optical power is launched into SMF.

10Gb/s XFP CWDM Transceiver (KW8910-xx)
Hot Pluggable, Duplex LC, 1271~1611nm, CWDM DFB&PIN, SMF

2. Measured with a PRBS $2^{31}-1$ test pattern @10.3125Gbps BER< 10^{-12} .

● **Pin Assignment**

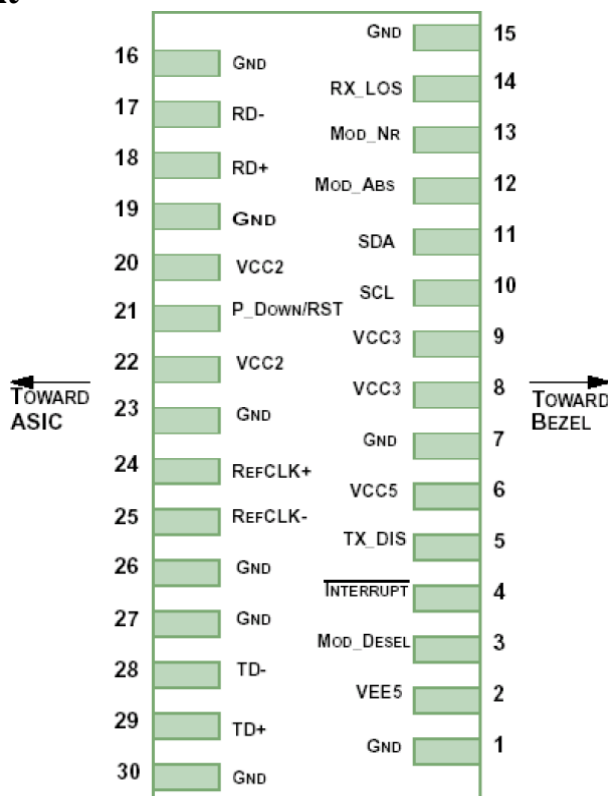


Diagram of Host Board Connector Block Pin Numbers and Name

● **Pin Description**

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to, respond to 2-wire serial interface commands	
4	LVTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTL-I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1

10Gb/s XFP CWDM Transceiver (KW8910-xx)
Hot Pluggable, Duplex LC, 1271~1611nm, CWDM DFB&PIN, SMF

17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Note

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. A Reference Clock input is not required .

● **Digital Diagnostic Functions**

As defined by the XFP MSA 1 , Kewei fiber’s XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:


- ✓ Transceiver temperature
- ✓ Laser bias current
- ✓ Transmitted optical power
- ✓ Received optical power
- ✓ Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.


The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information including memory map definitions, please see the XFP MSA

Specification.

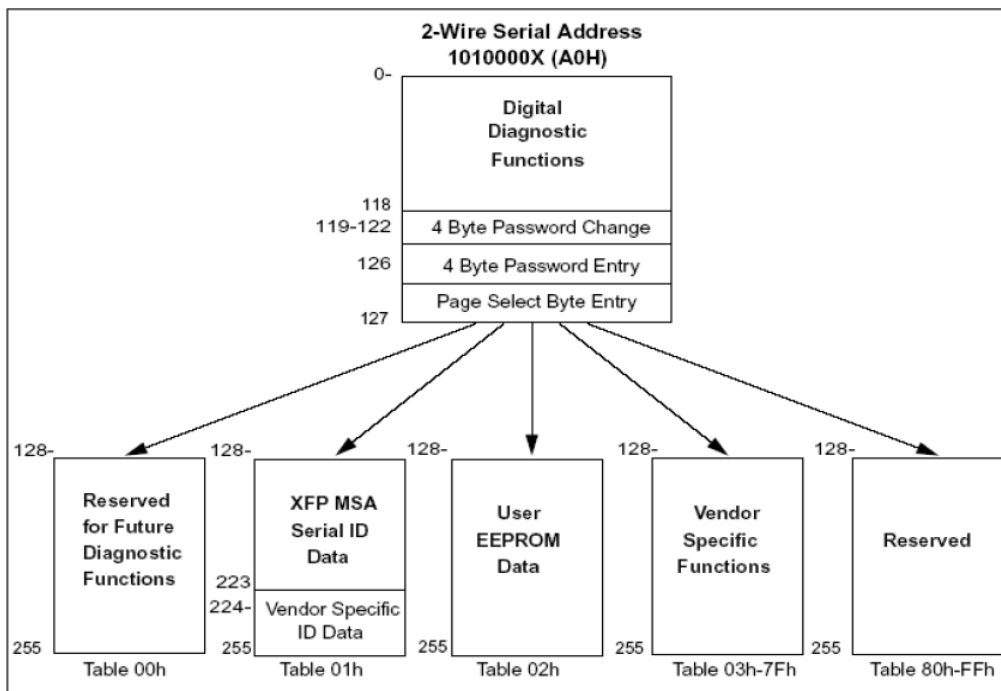


● **Recommended Circuit**

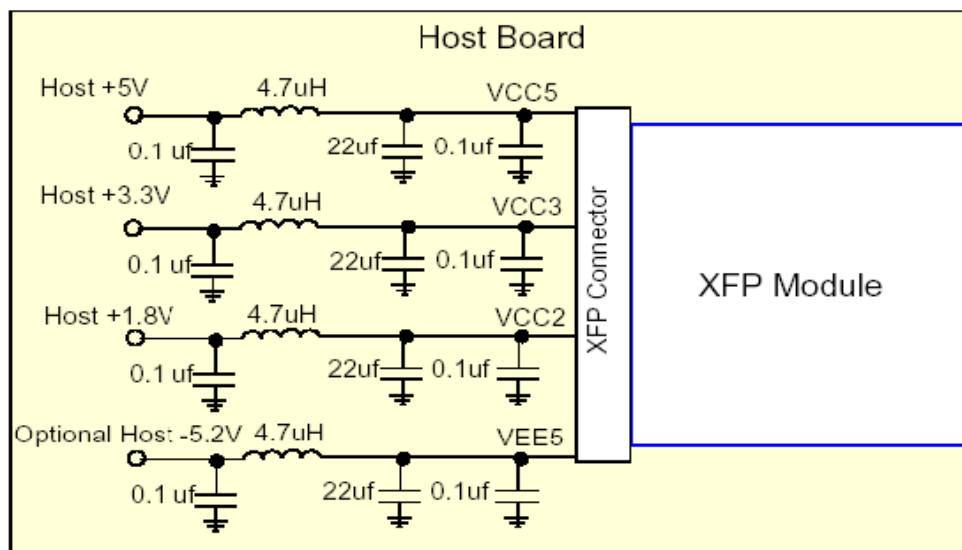


Recommended Host Board Power Supply Circuit

10Gb/s XFP CWDM Transceiver (KW8910-xx)
Hot Pluggable, Duplex LC, 1271~1611nm, CWDM DFB&PIN, SMF

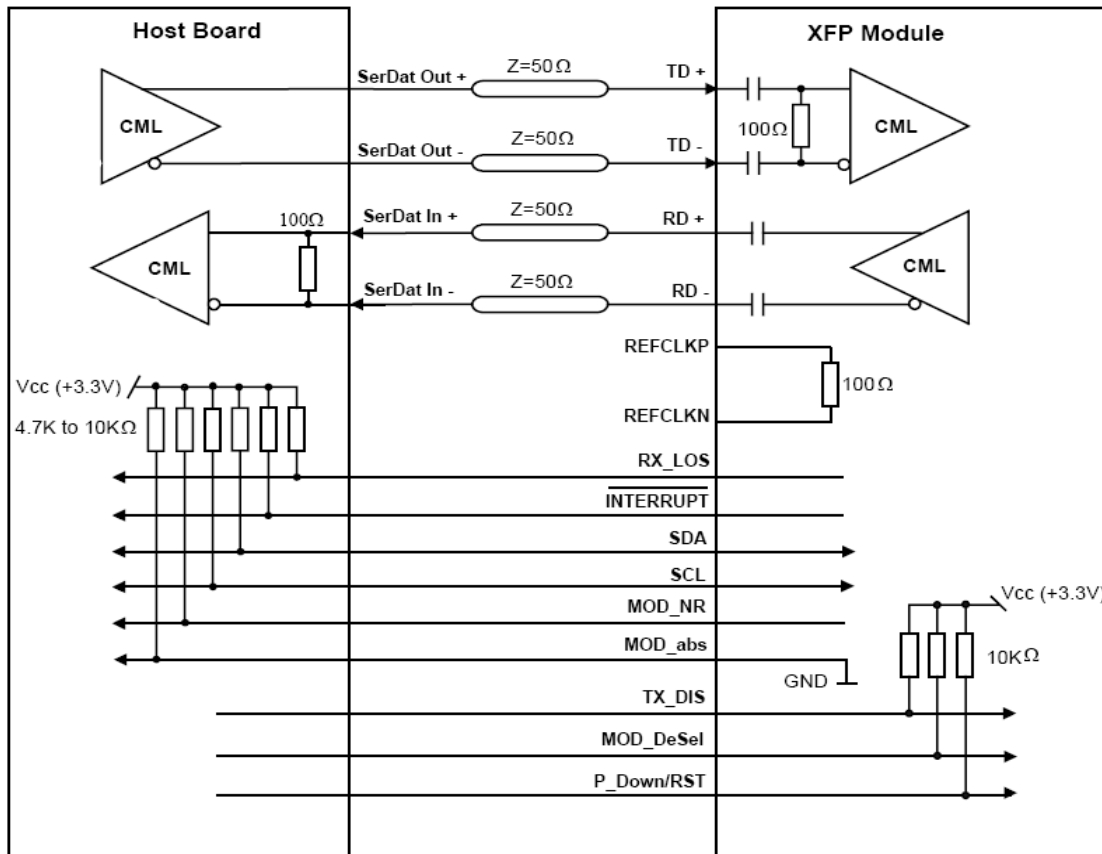

Recommended High-speed Interface Circuit

● **Mechanical Dimensions**

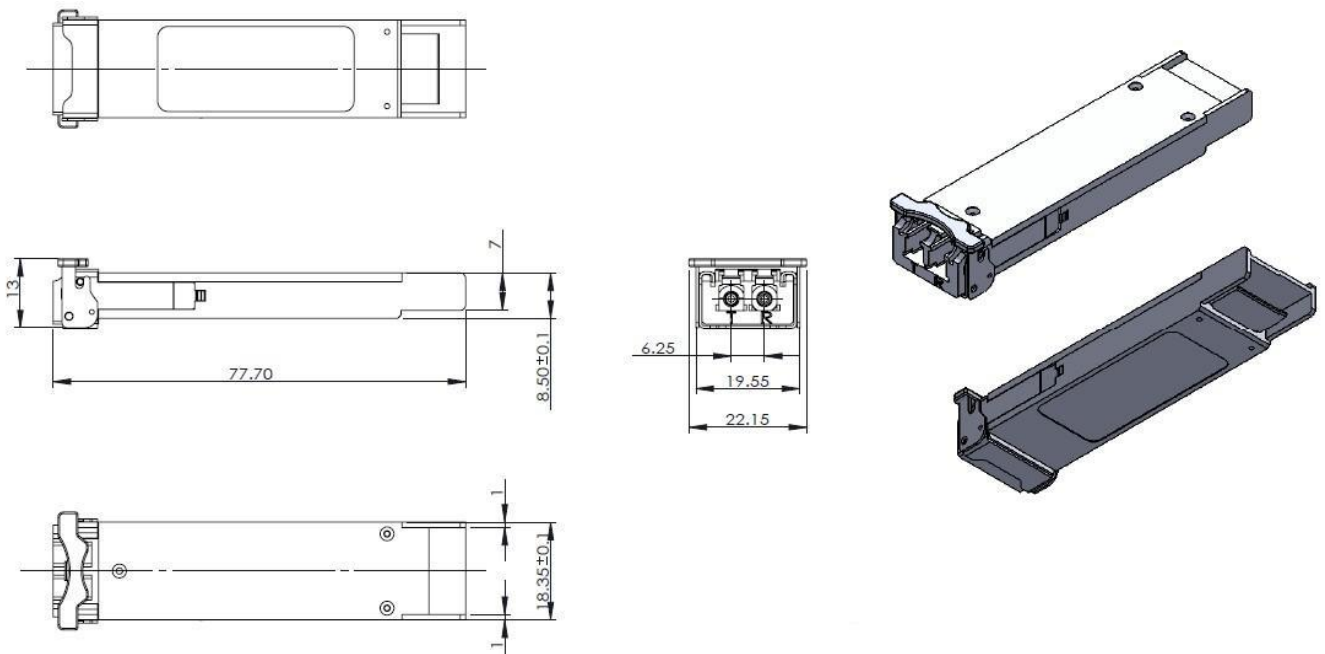

● **Order Information**

Part No.	Data Rate	Central wavelength	Optical Link budget	Recommend Distance
KW8910D-27	10Gbps	1271nm	8.5dB	10km
KW8910D-29	10Gbps	1291nm	8.5dB	10km
KW8910D-31	10Gbps	1311nm	8.5dB	10km
KW8910D-33	10Gbps	1331nm	8.5dB	10km
KW8910D-35	10Gbps	1351nm	8.5dB	10km
KW8910D-37	10Gbps	1371nm	8.5dB	10km
KW8910D-39	10Gbps	1391nm	8.5dB	10km
KW8910D-41	10Gbps	1411nm	8.5dB	10km
KW8910D-43	10Gbps	1431nm	8.5dB	10km
KW8910D-45	10Gbps	1451nm	8.5dB	10km
KW8910D-47	10Gbps	1471nm	8.5dB	10km
KW8910D-49	10Gbps	1491nm	8.5dB	10km
KW8910D-51	10Gbps	1511nm	8.5dB	10km
KW8910D-53	10Gbps	1531nm	8.5dB	10km
KW8910D-55	10Gbps	1551nm	8.5dB	10km
KW8910D-57	10Gbps	1571nm	8.5dB	10km
KW8910D-59	10Gbps	1591nm	8.5dB	10km
KW8910D-61	10Gbps	1611nm	8.5dB	10km

Kewei fiber reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Kunshan Kewei Fiber Communications Equipment Co.,Ltd

Copyright © KEWEI FIBER

All Rights Reserved